(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 13 January 2005 (13.01.2005)

PCT

(10) International Publication Number WO 2005/003808 A1

(51) International Patent Classification7: G05D 1/02 G01S 5/02,

(21) International Application Number:

PCT/FT2004/000391

(22) International Filing Date: 28 June 2004 (28.06.2004)

(25) Filling Language:

English

(26) Publication Language:

English

(30) Priority Data: 20031007

3 July 2003 (03.07.2003) FI

(71) Applicant (for all designated States except US): SAND-VIK TAMROCK OY [FI/FI]; Pihtisulunkatu 9, FI-33330 Tampere (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): MÄKELÄ, Hannu

[FI/FI]; Repovuorentie 7 B D, FI-00670 Helsinki (FI). PULLI, Riku [FI/FI]; Korvenkatu 81 F 11, FI-33300 Tampere (FI). SOIKKELI, Timo [FI/FI]; Vuorikuja 13, FI-33960 Pirkkala (FI).


(74) Agent: KOLSTER OY AB; Iso Roobertinkata 23, P.O.Box 148, FI-00121 Helsinki (FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) TILLE: METHOD AND SYSTEM FOR MONITORING LOCATION OF MINING VEHICLE

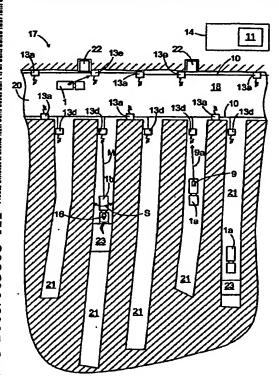

(57) Abstract: The invention relates to a method and a system for monitoring the location of a mining vehicle in a mine. The first mine section (18) is provided with a wireless network (10) for data transmission between the mining vehicle (1, 1s, 1b) and the mine control system (11). In addition, the network is used for positioning. In the second mine section (21), the location is determined by means of measuring devices provided in the mining vehicle.